

PENTAIR VALVE ACTUATOR INSTALLATION INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS READ AND FOLLOW ALL INSTRUCTIONS SAVE THESE INSTRUCTIONS

WARNING

Before installing this product, read and follow all warning notices and instructions provided with this pump. Failure to follow safety warnings and instructions can result in severe injury, death, or property damage. Call (800) 831-7133 for additional free copies of these instructions.

APPLICATION

For automatic operation of a 2-way or 3-way valve.

INSTALLATION

1. Remove knob, handle and four screws from the valve cover.
2. Align splines of the actuator shaft over shaft of valve.
3. If the actuator is not aligned with mounting holes on valve cover, rotate the actuator (while still attached to valve) until the actuator is positioned correctly over the valve.
4. Use the 4 mounting screws provided to mount actuator to valve cover, USE SELF TAPPING SCREWS WHEN REQUIRED.
5. Mount the valve handle and knob to the actuator.
6. Connect cord into automation circuit board at appropriate Valve Actuator socket.



VALVE POSITION

If the valve rotates to the wrong position, adjust the switch on the back of the actuator between ON1 and ON2 positions. This will rotate the valve to the correct position.


ADJUSTING VALVE ACTUATOR

Most installations do not require adjusting the valve actuator. However, if a bypass, is desired follow the steps below:

1. Remove valve actuator cover.
2. Loosen lock nut with a pair of pliers (this allows moving the adjustment cams).
3. Rotate upper cam to change clockwise rotation stop point. Rotate lower cam to change counter-clockwise rotation stop point.
4. The toggle switch on the back of the valve actuator can be used to verify if the new adjustment is correct (flip between ON1 & ON2).
5. Tighten lock nut and replace cover.



SPECIFICATIONS

Voltage: 24 VAC
Amp: 0.65
Torque: 250 inch pounds
Size: L 7.5", H 4.75", W 4.25"
Material: Gears - Steel
Grease: MoS2 Lubricant
Cord Length: 15 ft.
Rated: Outdoor use

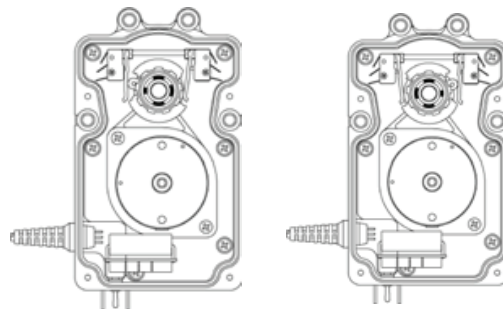

REPLACEMENT PARTS

8691030	REPLACEMENT CABLE for Actuator
270077	GEAR SET for Actuator; 3 GEARS
CVASCR	MOUNTING SCREW for Actuator (qty. 4)
520010Z	MICRO-SWITCH for Actuator

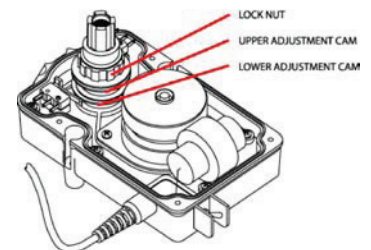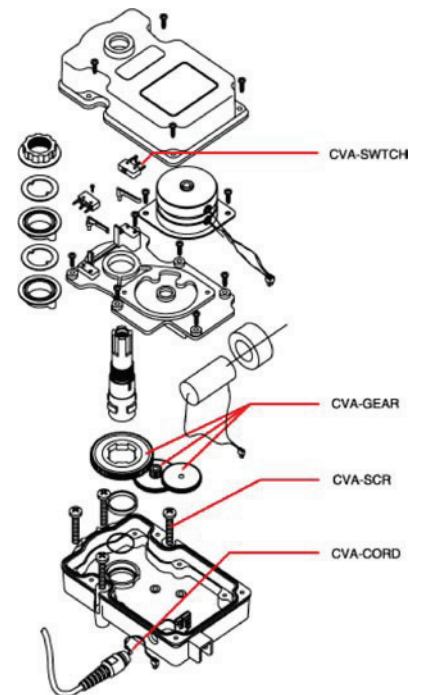

Customer Support 800.831.7133

© 2014 Pentair Aquatic Systems. All rights reserved. www.pentairpool.com

P/N 270140.B 2/14